

V100 (PSM-T)

Volumetric cold potable water meters

Overload flow rate (Q ₄)	kL/h	5.0	5.0	7.0	10.0	15.0
Size	mm	15	20	25	32	40

The V100 (PSM-T) meter is designed for the measurement of cold potable water and offers accuracy, long maintenance free life and is highly resistant to tampering.

The range includes five different meters to suit overload flow rates ranging from 5.0 kL/h up to 15.0 kL/h. The V100 (PSM-T) is suitable for water temperatures up to 50°C and a maximum working pressure of 1400 kPa. Standard counter registration is in kL and litres.

Compliance with NSC and Australian Standards

Every V100 (PSM-T) water meter is individually tested for accuracy before despatch.

Pattern approval under Certificate of Approval No: 14/3/1 has been granted by the National Standards Commission for the 15mm and 20mm sizes. Other meters in the V100 (PSM-T) range exceed the transitional performance requirements of the Australian Standard:

AS 3565.1-2004, Meters for water supply Part 1: Cold water meters

Design Features

- Positive displacement volumetric rotary piston principle of measurement ensures registration even at the very lowest rates of flow with maintained accuracy over the flow range.
- Can be installed in horizontal, vertical or inclined pipelines without affecting accuracy.
- Requires no calibration throughout its lifespan.
- "O" ring seal placed between the measuring chamber and the meter body ensures that internal leaks which could by-pass the measuring chamber are eliminated.
- Use of advanced engineered plastics for the measuring chamber minimises wear and maintains reliability under all operating conditions.
- A large surface area fine filter fitted on the measuring chamber inlet prevents damage by gathering solid particles. Due to its design, a partially obstructed filter will not affect the meter's accurate registration.

Counter

The counter is fully sealed, vacuum filled, with an easy to read straight reading presentation. The number rollers are totally immersed in a non-toxic liquid. A sac attached to the counter



casing acts as a balancing membrane and ensures the pressure of the liquid in the counter is the same as that of the water inside the meter. The counter is placed in a window inside the meter body in the direction of flow for easy reading.

Tamper Resistant

The V100 (PSM-T) offers outstanding resistance to illegal tampering. Its unique conical body half design means it cannot be disassembled while in service and the mechanically driven counter is resistant to magnetic interference. An integral non-return valve is fitted as standard to all V100 (PSM-T) meters or a dual check valve assembly option is also available for the 20 and 25mm sizes. This stops the meter being run back illegally. A lead seal will reveal any attempt that is made to dismantle the meter. An individual serial number is engraved on each meter.

Remote / Electronic Reading

The standard V100 (PSM-T) provides the water industry with the flexibility to meet future demands. Today a conventional meter - tomorrow, whilst in use and without any disconnection, risk of component damage, need to re-calibrate and with no affect on meter performance or accuracy, it can be easily converted for electronic / remote readout capability by simply removing a plastic plug and fitting a magnetically operated "T probe."

Optional Features

- Meters can be supplied with the T probe fitted.
- Meters can be supplied with various standard connections (e.g. nut and tail, ball joint, flanged, etc.).
- The 20mm and 25mm V100 (PSM-T) meters can be supplied fitted with two independently acting non-return valves in series at the downstream end of the meter in compliance with: - AS 3565.3-2004, Meters for water supply Part 3: Water meters with integral dual check valves.

Materials


All V100 (PSM-T) meters are manufactured from the highest quality materials ensuring maximum resistance to wear and corrosion. Copper alloys in contact with potable water are de-zincification resistant and comply with the Australian Standard AS 2345. All materials in contact with potable water comply with the Australian Standard AS/NZS 4020.

V100 (PSM-T) Performance

Meter Size - Nominal diameter (DN)		15 mm	20 mm	25 mm	32 mm	40 mm
Minimum flow rate (Q1) ± 5%	L/h	20	20	32	50.4	80
Transitional flow rate (Q2) ± 2%	L/h	32	32	51.2	80.6	128
Permanent flow rate (Q3) ± 2%	kL/h	4	4	4	6.3	10
Overload flow rate (Q4) ± 2%	kL/h	5	5	7	10	15
Minimum registration flow rate	L/h	3	3	13	22	37
Pressure loss - Std / DCV	kPa	24.9	24.5 / 69	23 / 65	17	23
@ flow rate	kL/h	2.5	2.5	3.5	5	7.5
Maximum working pressure	kPa	1400	1400	1400	1400	1400
Working temperature range	°C	0.3 to 30	0.3 to 30	0.3 to 30	0.3 to 30	0.3 to 30
Operating temperature range	°C	0.3 to 50	0.3 to 50	0.3 to 50	0.3 to 50	0.3 to 50
Minimum counter registration	L	0.1 ❶	0.1 ❶	0.1	0.1	0.1
Maximum counter registration	kL	99999.999 ❶	99999.999 ❶	99999.999	99999.999	99999.999
Pulse Output	Litre/pulse	5 ❶	5 ❶	5	5	5
Dimensions						
Overall meter length ❷ (± 1 mm) (L)	mm	133	153	177	189	231
Maximum meter diameter (B)	mm	87	87	101	121	160
Meter weight - Bare Meter ❸	kg	1.1	1.25	2.1	3.6	5.7

- Notes:**
- ❶ Technical data shown is for meters fitted with 5 x 3 number wheel counters. For meters fitted with 4 x 4 number wheel counters, the data for minimum and maximum registration plus pulse output would be 0.01, 9999.9999 and 0.5 respectively.
 - ❷ Overall lengths other than those shown are also available.
 - ❸ All weights shown including 20 and 25mm DCV meters are unpacked without connections and are approximate only.

V100 (PSM-T) Dimensions

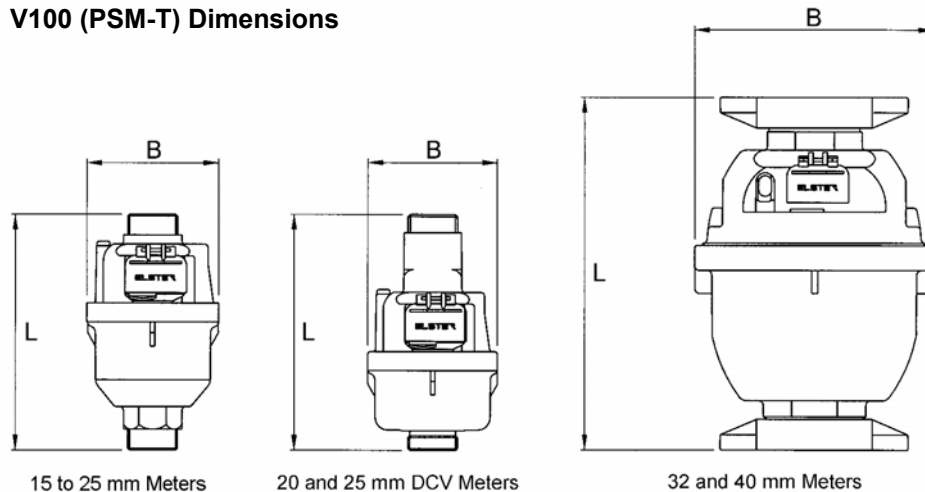

The Company's policy is one of continuous improvement and the right is reserved to modify the specifications without notice.

Elster Metering Pty Ltd

ABN 98 004 088 680

HEAD OFFICE / VICTORIA:
NEW SOUTH WALES:
TASMANIA:
QUEENSLAND:
WESTERN AUSTRALIA:

55 Northcorp Blvd, Broadmeadows VIC 3047
14/22 Northumberland Rd, Caringbah NSW 2229
412 Hobart Road, Launceston TAS 7250
12 Holland Street, Northgate QLD 4013
3/19 Action Road, Malaga WA 6090

Tel: (03) 9355 2000
Tel: (02) 8536 7400
Tel: (03) 6344 2466
Tel: (07) 3266 7733
Tel: (08) 9248 7899

Fax: (03) 9355 2001
Fax: (02) 9526 2244
Fax: (03) 6343 0711
Fax: (07) 3266 7695
Fax: (08) 9248 9499

Website: www.elstermetering.com

Leaflet No: SML001 05/11